

Update Chip for Power Pro Customers ONLY

Power Cab or CB3a:

If you are using the CAB06r with a Power Cab or SB3a please disregard this notice.

Master Series CS01 command station:

If you have an older Master Series CS01 command station, do not install this update (it will clear out any consists, macros and other system settings) please contact NCE for the correct update.

Power Pro or Powerhouse Pro 5 or 10 Amp (or CS02 command station):


Satisfactory operation of this CAB06r with an NCE Power Pro 5 Amp (or 10 Amp) system requires software version Mar 1, 2007C (or newer). We have included the correct update chip in this package. The following instructions show how to install the update. If you are replacing version Mar 1, 2007, Mar 1, 2007A or Mar 1 2007B none of your consists, macros or system settings will be lost. After installation be sure to go into the SET CMD STA menu and make sure the "RADIO FIX" is turned off.

If you are updating an older version your system will be completely reset to factory settings so make sure you have a record of any consists, macros, etc.

Replacing the EPROM in your Power Pro or CS02:

Follow the steps below to install a new EPROM.

1. Unplug all cables from the front of the Power Pro (to make sure the power is off).
2. Remove the 4 cover screws from the Power Pro and slide off the cover.
3. Pry the EPROM straight up from the socket with a small flat blade screwdriver. Be sure to pry only under the chip and not the socket it is mounted in.
4. Carefully bend the leads of the new EPROM until they are straight down the sides of the EPROM to line up with the socket holes.
5. Insert the new EPROM into the socket being careful to get pin 1 into the correct hole. Pin 1 is indicated on the chip by a "half moon" cutout in the end of the chip.
6. Examine the installation to ensure all 28 pins have engaged the socket correctly.
7. Replace the cover (angled edge goes toward the front of the Power Pro) and its 4 retaining screws.

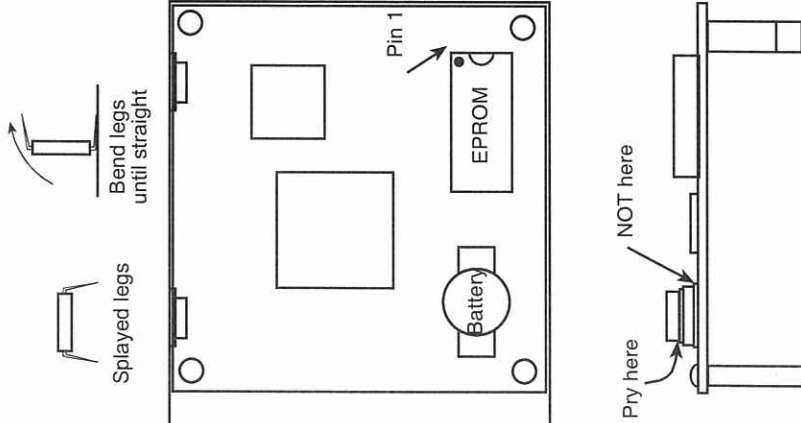

Update Chip for Power Pro Customers ONLY

Power Cab or CB3a:

If you are using the CAB06r with a Power Cab or SB3a please disregard this notice.

Master Series CS01 command station:

If you have an older Master Series CS01 command station, do not install this update (it will clear out any consists, macros and other system settings) please contact NCE for the correct update.

Power Pro or Powerhouse Pro 5 or 10 Amp (or CS02 command station):

Satisfactory operation of this CAB06r with an NCE Power Pro 5 Amp (or 10 Amp) system requires software version Mar 1, 2007C (or newer). We have included the correct update chip in this package. The following instructions show how to install the update. If you are replacing version Mar 1, 2007, Mar 1, 2007A or Mar 1 2007B none of your consists, macros or system settings will be lost. After installation be sure to go into the SET CMD STA menu and make sure the "RADIO FIX" is turned off.

If you are updating an older version your system will be completely reset to factory settings so make sure you have a record of any consists, macros, etc.

Replacing the EPROM in your Power Pro or CS02:

Follow the steps below to install a new EPROM.

1. Unplug all cables from the front of the Power Pro (to make sure the power is off).
2. Remove the 4 cover screws from the Power Pro and slide off the cover.
3. Pry the EPROM straight up from the socket with a small flat blade screwdriver. Be sure to pry only under the chip and not the socket it is mounted in.
4. Carefully bend the leads of the new EPROM until they are straight down the sides of the EPROM to line up with the socket holes.
5. Insert the new EPROM into the socket being careful to get pin 1 into the correct hole. Pin 1 is indicated on the chip by a "half moon" cutout in the end of the chip.
6. Examine the installation to ensure all 28 pins have engaged the socket correctly.
7. Replace the cover (angled edge goes toward the front of the Power Pro) and its 4 retaining screws.

